


36 503 979




- cover plate Ø 124 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge

| | | |
|---|-------------------------------|---------------|
|  | Brushed Platinum | 36 503 979-06 |
|  | Chrome | 36 503 979-00 |
|  | Platinum | 36 503 979-08 |
|  | Durabress (23kt Gold) | 36 503 979-09 |
|  | Dark Chrome | 36 503 979-19 |
|  | Brushed Durabress (23kt Gold) | 36 503 979-28 |
|  | Matte Black | 36 503 979-33 |
|  | Brushed Champagne (22kt Gold) | 36 503 979-46 |
|  | Champagne (22kt Gold) | 36 503 979-47 |
|  | Brushed Chrome | 36 503 979-93 |
|  | Brushed Dark Platinum | 36 503 979-99 |


Required miscellaneous

| | | |
|---|--|---------------|
|  | xTOOL Concealed thermostat module without volume control - •max. recess depth 110 mm •min. recess depth 85 mm | 35 503 970 90 |
|---|--|---------------|

Required miscellaneous


| | | |
|---|--|---------------|
|  | xGRID Installation track 555 mm - | 12 360 970 90 |
|---|--|---------------|

Recommended miscellaneous


| | | |
|---|--|---------------|
|  | xGRID Attachment set for integrating in the dry wall construction - | 12 340 970 90 |
|---|--|---------------|

36 503 979

mm [inches]

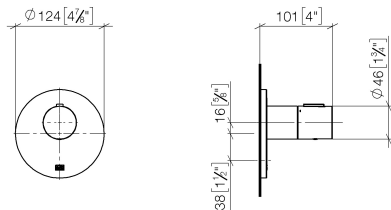

Flow rate chart

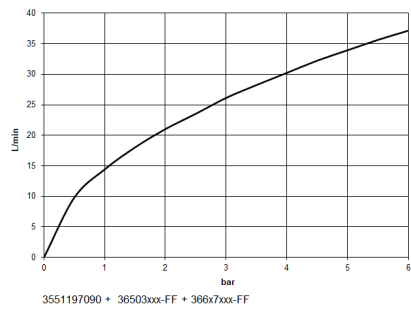

Certificates


WRAS_2011026.

DVGW_DW-
6512DN0706.

LGA_29930.

LGA_29932.

36 503 979

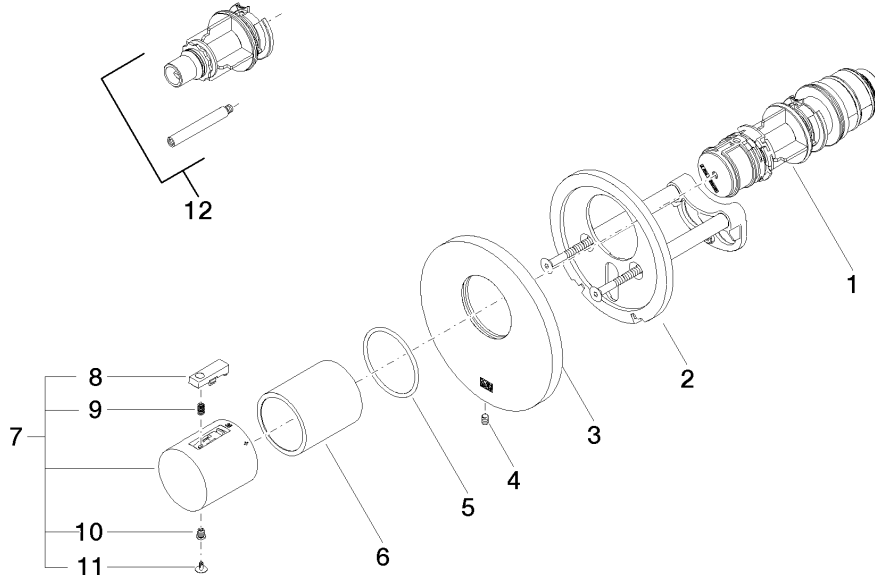

Spare parts list

| No. | Item Number | Name | Quantity used | Delivery time |
|-----|--------------------|-------------------|---------------|---------------|
| 1 | 90 15 02 065 00 90 | cartridge | 1 | 2 |
| 2 | 90 11 01 196 00 90 | base | 1 | 2 |
| 3 | 09 11 02 537-06 | cover | 1 | 10 |
| 4 | 09 31 11 048 90 | pin | 1 | 2 |
| 5 | 90 14 10 049 00 90 | seal | 1 | 2 |
| 6 | 90 21 02 112 00-06 | sleeve | 1 | 10 |
| 7 | 90 17 33 004 00-06 | handle | 1 | 10 |
| 8 | 90 21 33 010 00-13 | handle | 1 | 2 |
| 9 | 90 16 02 027 00 90 | spring | 1 | 2 |
| 10 | 90 30 30 136 00 90 | screw | 1 | 2 |
| 11 | 90 31 20 049 00-13 | plug | 1 | 30 |
| 12 | 12 178 970 90 | Extension 46 mm - | 1 | 2 |