


## TECHNICAL SPECIFICATIONS



## PRODUCT

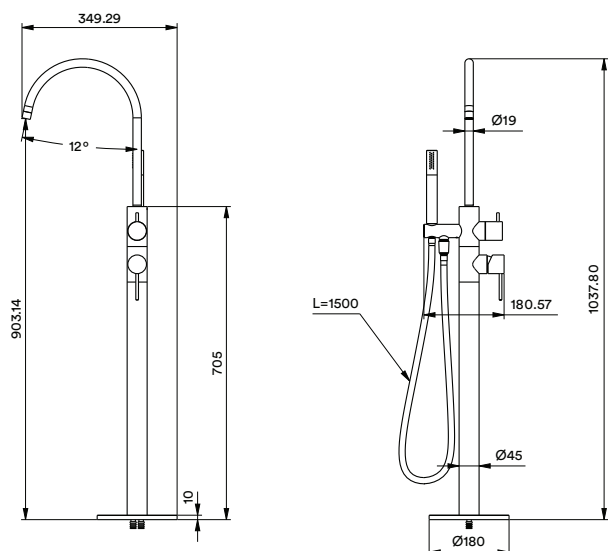


# STEEL

## MIX - SS - 006

Freestanding Bath Mixer including Handshower

## DETAILED ASSEMBLY

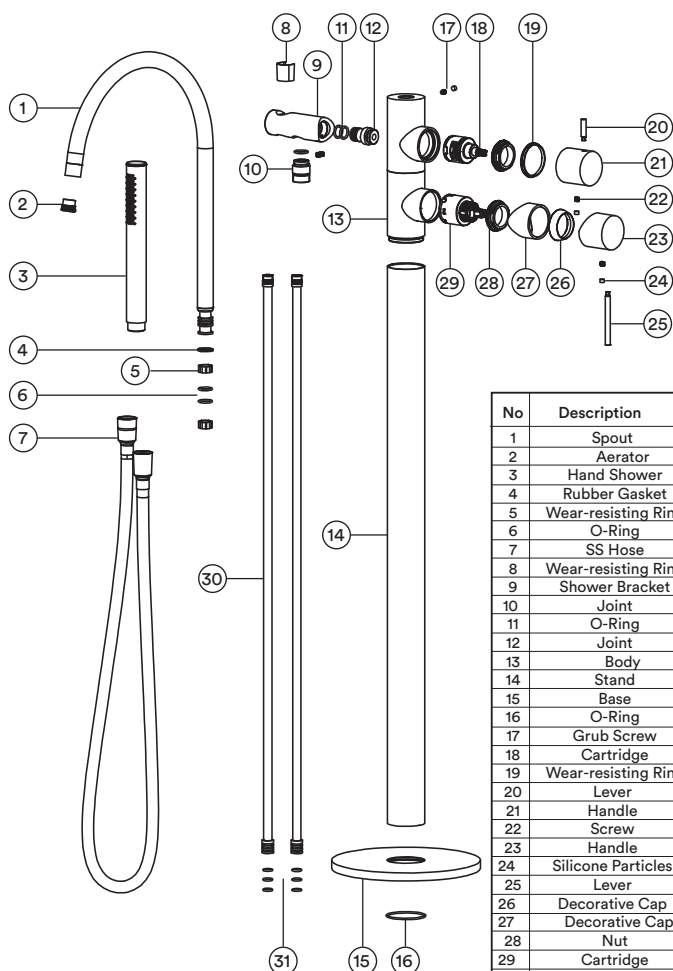

| No | Description         | Qty | Material |
|----|---------------------|-----|----------|
| 1  | Spout               | 1   | SUS-316  |
| 2  | Aerator             | 1   | ABS      |
| 3  | Hand Shower         | 1   | Assembly |
| 4  | Rubber Gasket       | 1   | NBR      |
| 5  | Wear-resisting Ring | 2   | POF      |
| 6  | O-Ring              | 2   | NBR      |
| 7  | SS Hose             | 1   | SUS-304  |
| 8  | Wear-resisting Ring | 1   | POF      |
| 9  | Shower Bracket      | 1   | SUS-304  |
| 10 | Joint               | 1   | SUS-304  |
| 11 | O-Ring              | 2   | NBR      |
| 12 | Joint               | 1   | SUS-304  |
| 13 | Body                | 1   | SUS-316  |
| 14 | Stand               | 1   | SUS-316  |
| 15 | Base                | 1   | SUS-316  |
| 16 | O-Ring              | 1   | NBR      |
| 17 | Grub Screw          | 1   | SUS-3164 |
| 18 | Cartridge           | 1   | Assembly |
| 19 | Wear-resisting Ring | 1   | POF      |
| 20 | Lever               | 1   | SUS-316  |
| 21 | Handle              | 1   | SUS-316  |
| 22 | Screw               | 4   | SUS-316  |
| 23 | Handle              | 1   | SUS-316  |
| 24 | Silicone Particles  | 3   | NBR      |
| 25 | Lever               | 1   | SUS-316  |
| 26 | Decorative Cap      | 1   | SUS-316  |
| 27 | Decorative Cap      | 1   | SUS-316  |
| 28 | Nut                 | 2   | SUS-316  |
| 29 | Cartridge           | 1   | Assembly |
| 30 | Inlet Hose          | 2   | Assembly |
| 31 | O-Ring              | 6   | NBR      |

## FEATURES

- 15 year warranty.
- 316 stainless steel.
- European cartridge.
- Flow rate: 20.5 Litres per minute @ 3 bar pressure.
- Concealed body CON-SS-003 required.



## WARRANTY

Refer to [joansa.co.za](http://joansa.co.za) for warranty terms & conditions.

## CARE

### Preparation:

Apply copper slip lubricant to prevent seizing of threaded fasteners.

### Cleaning:

- Remove dirt using clean water and a soft cotton cloth.
- Clean the stainless steel surface with:
  - Gentle liquid detergent.
  - Colourless glass cleaner.
  - Non-abrasive polishes.
- Dry and remove all cleaning material with a soft cotton cloth.

## CERTIFICATION

JASWIC APPROVED.  
SABS TESTED & APPROVED.

**Joan**

Stainless Steel  
with a conscience

+27 (021) 510 0489  
30 Royal Road, Maitland,  
Cape Town. 7405. South Africa

## FLOW RATE

