

COYA Two-hole tub mixer for freestanding installation with hand shower set - Brushed Platinum

COYA

25 943 404



- Spout: Round aerated stream
- Water flow rate limited to max. 6.5 gpm
- Hand-held shower: COMPACT RAIN, flow rate max. 1.8 gpm (at 3 bar)
- Hand shower with descaling system
- 11" Projection
- Swiveling spout 360°
- Tub / shower diverter
- Total height 37-1/4"
- Riser height 26"
- Height to aerator/spout outlet 32-7/8"
- Flanges Ø 3-7/8"
- Center to center 5-7/8"
- Metal shower hose 49-1/4" with anti-twist device
- Hand shower to be mounted on right pillar

Internal backflow preventer.

NOTE: Local building codes may require the use of an anti-scald device. Please refer to remote pressure balance valve (35 914 970 90)

Internal backflow preventer.

NOTE: Local building codes may require the use of an anti-scald device. Please refer to remote pressure balance valve (35 914 970 90)

	Brushed Platinum	25 943 404-06
	Chrome	25 943 404-00
	Dark Chrome	25 943 404-19
	Brushed Durabrass (23kt Gold)	25 943 404-28
	Brushed Dark Brass (PVD)	25 943 404-39
	Brushed Bronze (PVD)	25 943 404-42
	Brushed Dark Bronze (PVD)	25 943 404-43
	Brushed Champagne (22kt Gold)	25 943 404-46
	Champagne (22kt Gold)	25 943 404-47
	Brushed Dark Platinum	25 943 404-99

Required article



Floor mounting rough set -

- Min. rough in depth 3-1/8"
- Max. rough in depth 6-1/4"


35 951 970-90
0010

COYA Two-hole tub mixer for freestanding installation with hand shower set - Brushed Platinum


COYA

25 943 404

mm [inches]

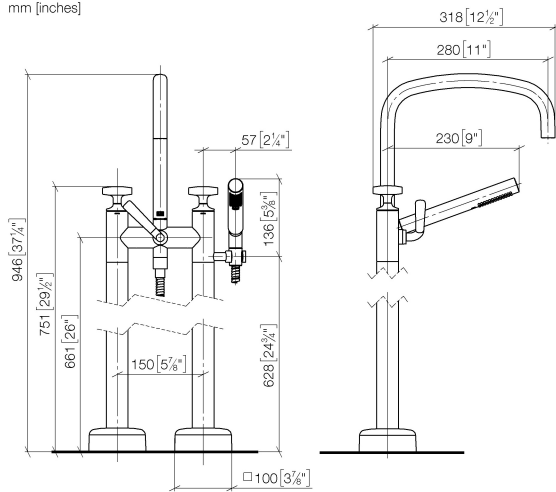

Flow rate chart

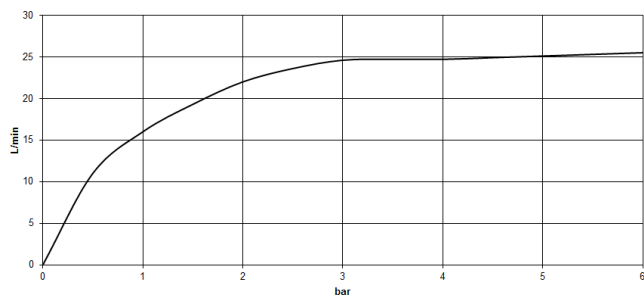

Codes & Standards

ASME A112.18.1

cUPC

DIN 4109

EN 1717

ISO 3822

Ü-Zeichen



COYA Two-hole tub mixer for freestanding installation with hand shower set - Brushed Platinum

COYA

25 943 404

Certificates and sustainability

LGA_29

Belgaqua_25-339-2 IAPMO_4976 (

COYA Two-hole tub mixer for freestanding installation with hand shower set - Brushed Platinum

COYA

25 943 404

